


PRO-X SERIES | ULTRA SERIES | SPECIAL ULTRA SERIES | ECONOMY SERIES

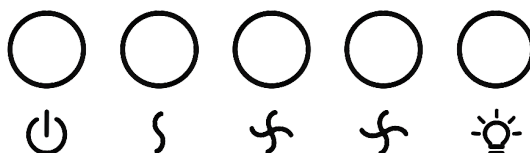


CONTROL PANEL GUIDE

FOR XTREMEAIR RANGE HOODS

XtremeAIRusa.com

PANEL CONTROL GUIDE

GESTURE DIGITAL TOUCH PANEL (for equipped models)

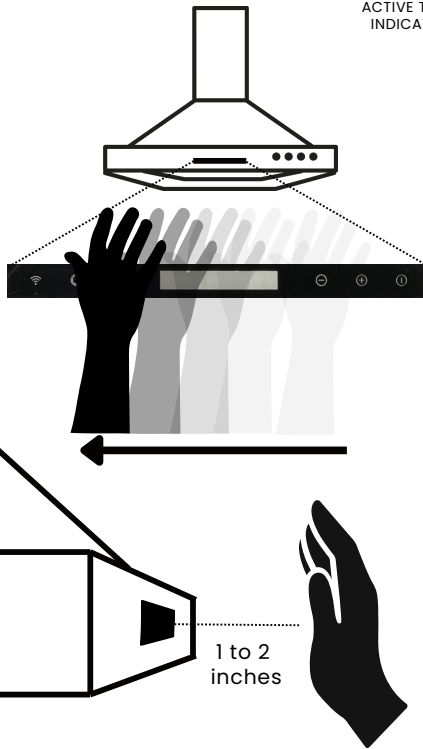

HOW TO USE:

Your range hood features touch-free gesture controls, allowing you to adjust settings with a simple hand swipe. To use gestures, hold your hand 1 to 2 inches in front of the touch panel and swipe in the direction indicated.


IMPORTANT NOTES:

Gesture sensing is ON when the hand icon is turned on. Gesture sensing can be turned off by touching the icon.

The unit will default to ON on startup, and can easily be turned off.

Only swiping to the LEFT powers on the fan.


Only swiping to the RIGHT powers off the fan

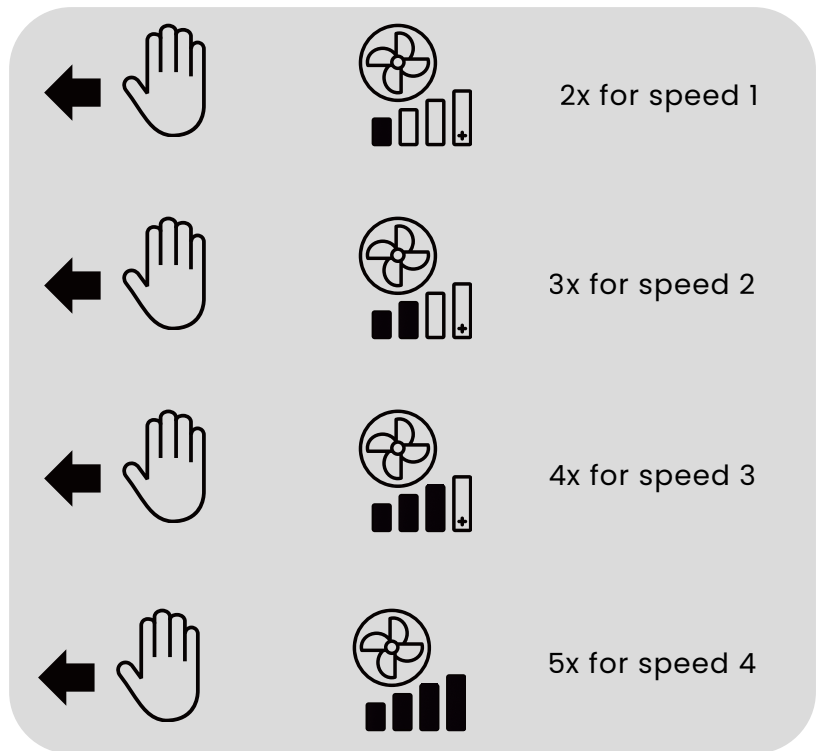

XtremeAIRusa.com

PANEL CONTROL GUIDE

DIGITAL TOUCH PANEL

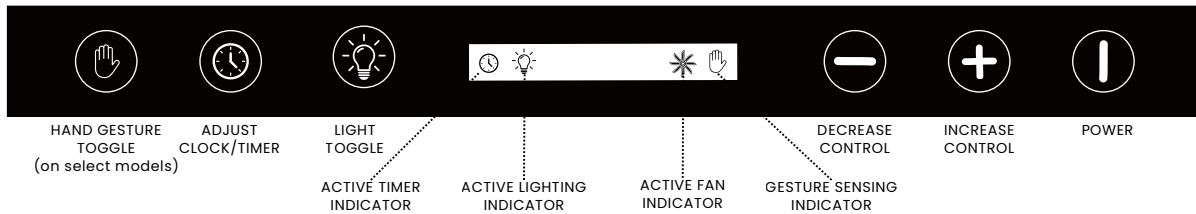


Clock & Delay Timer

Clock Button & Delay Timer Button: Set the clock: Touch the clock symbol with the fan off. The time on the display will blink. Adjust the hours with the (+) and (-) buttons. Adjust the minutes with the clock symbol again. After 3 seconds, the time will save. The clock is in 12-hr format. Delay Timer: Touch the clock symbol with the fan running. The default delay timer is 1 minute. Increase or decrease the timer duration up to 15 minutes with the (+) and (-) buttons.



Light Toggle

Touch to turn lights on / off




Minus (-) Button

Quick high speed on: When the unit is off, touch the (-) button once as a shortcut to turn on the fans with high speed setting.



Plus (+) Button


Quick low speed on: When the unit is off, touch the (+) button once as a shortcut to turn on the fans with low speed setting.



Power Button

Touch to turn unit on / off. Toggling will turn on/off backlit clock display.

MECHANICAL CONTROL PANEL

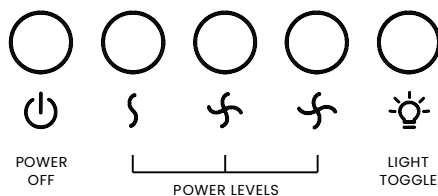

Power

While the blower (motor) is running, press button to turn off the motors.

Power Level

Press your desired speed (1, 2, 3)


Light Toggle

Press the button once to turn on the light, then press it again to turn the light off.

XtremeAIRusa.com

PANEL CONTROL GUIDE

LEGACY DIGITAL TOUCH PANEL

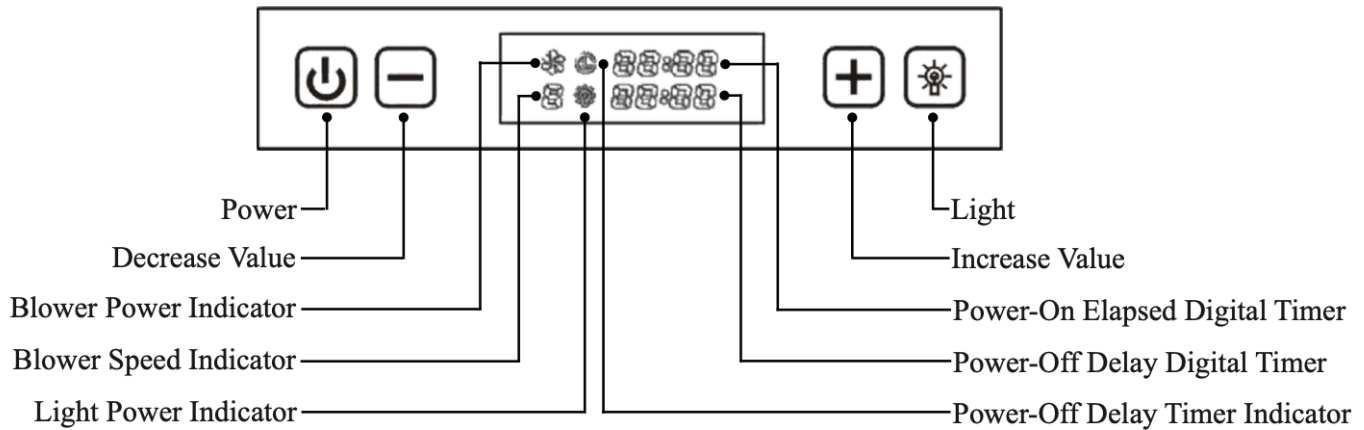


This range hood is designed to remove smoke, cooking vapors and odors from the cook top area. For best results, start the range hood before cooking and allow it to operate several minutes after the cooking is completed to clear all smoke and odors from the kitchen.

- **Button functions:**
 - **Power:** Power ON/OFF the range hood and activate power-off delay timer.
 - **Decrease Value:** Blower (motor) speed decrease, timer value decrease, and enter timer mode.
 - **Increase Value:** Blower (motor) speed increase timer value increase, and cumulative timer reset.
 - **Blower Power Indicator:** Lights up when blower (motor) is running.
 - **Blower Speed Indicator:** Shows current blower (motor) speed (1-6).
 - **Light Power Indicator:** Lights up when lights turned on.
 - **Light:** Turns ON/OFF and dim halogen lights.
 - **Power-On Elapsed Digital Timer:** Indicates the accumulated time the system is running.
 - **Power-Off Delay Digital Timer:** Indicates the length of time left for delay off function.
 - **Power-Off Delay Timer Indicator:** Lights up when auto-shutdown delay timer function is on.
- **Controls:**
 - **Automatic cleaning reminder:**
 - This range hood is equipped with a cleaning reminder that will activate following 30 hours of use. When blower (motor) starts to rotate, cumulative running time will be shown in *Power-On Elapsed Digital Timer*. This timer icon flashes when 30 hours is up and reminds user to clean the aluminum filter.
 - After cleaning the filter and when the motor is not in use, press and hold *Increase Value* button over 3 seconds to reset the timer. Please note that turning off the system will not reset the *Power-On Elapsed Digital Timer*.
 - **Adjusting the blower (motor) speed:**
 - Press *Power* button once to turn on the system. The *Blower Power Indicator* icon flashes showing that the blower (motor) is ready. *Decrease Value* button will decrease the speed of the blower (motor) from 6 to 1 (strongest to quietest). *Increase Value* button will increase the speed of the blower (motor) from 1 to 6 (quietest to strongest).
 - Press *Power* button once to turn off the system.

PANEL CONTROL GUIDE

LEGACY DIGITAL TOUCH PANEL CONTINUED

Control Panel Layout and Buttons Configurations:

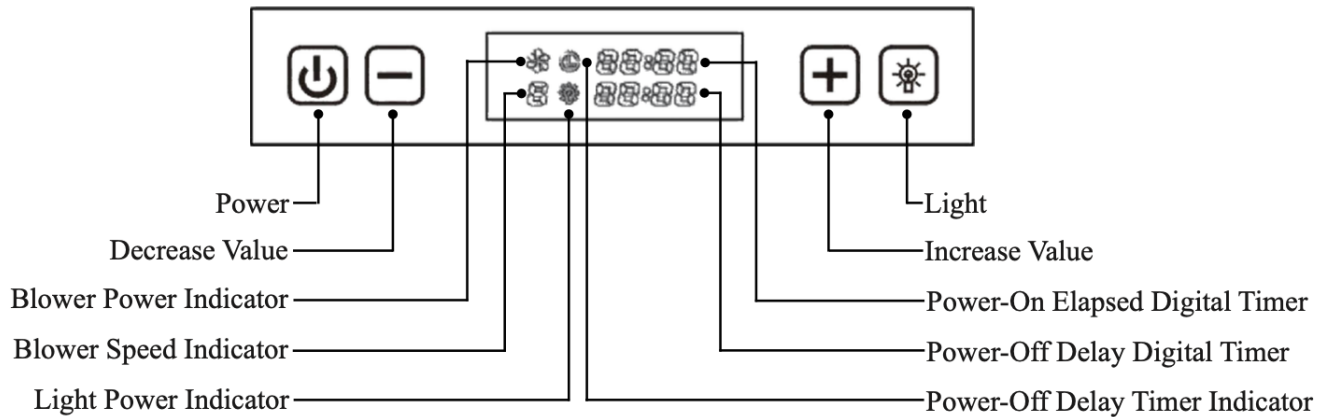

- Controls:
 - Adjusting the timer function:
 - While the blower (motor) is not running, press and hold *Decrease Value* button over 3 seconds to enter timer mode. Adjust to desired period of delay off timer by pressing *Increase Value* or *Decrease Value* button (minimum 1 minute to maximum 15 minutes). This setting will be saved immediately.
 - Activating the timer function:
 - While the blower (motor) is running, press and hold *Power* button for over 3 seconds to activate delay off timer. Power-off delay indicator will lit up and power-off delay digital timer will begin to countdown, when it reaches zero, the blower (motor) will shut down.
 - Adjusting the light:
 - Press *Light* button once to turn on the lights, and once again to turn off the lights.
 - While the lights are off, press and hold *Light* button for over 3 seconds to dim the lights from low to high. Level of brightness will be stored in system's memory.

CAUTION: DO NOT touch the lights until switched OFF and cooled.

Note: Light settings are independent from other settings (including power-off delay) and lights has to be manually turned on or off.

Note: The system saves user configurations, settings such as light, timer and blower (motor) speed will remain the same the next time it is turned on.

Notes

Updated models have 6 levels of fan speeds, while older models will have 4. There are some small differences in graphics and functions based on this diagram that may not be consistent with your model.